VALVE CLEARANCE

ADJUSTMENT


EM169–03

HINT:

Inspect and adjust the valve clearance when the engine is cold.


1. REMOVE CYLINDER HEAD COVER

(See page EM–15)

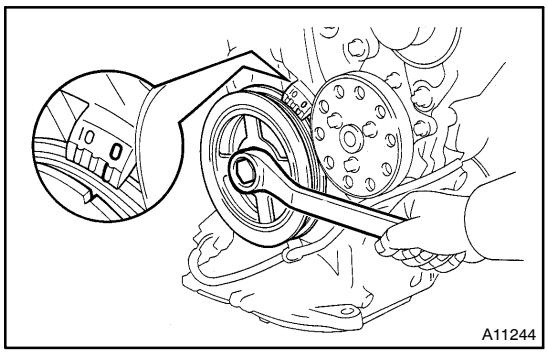


2. SET NO.1 CYLINDER TO TDC/COMPRESSION

(a) Turn the crankshaft pulley, and align its groove with the timing mark ”0” of the timing chain cover.

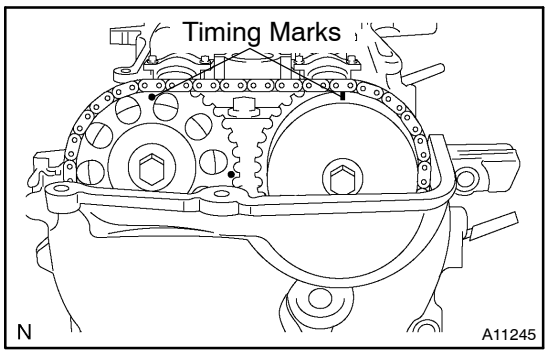

(b) Check that both timing marks on the camshaft timing sprocket and valve timing controller assembly are facing right upas shown in the illustration.

If not, turn the crankshaft 1 revolution (360°) and align the marks as above.

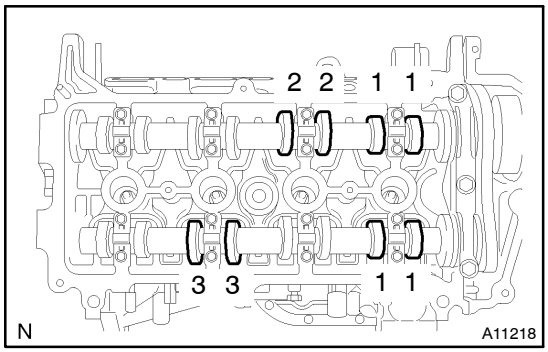

3. INSPECT VALVE CLEARANCE

(a) Check only the valves indicated.

- Using a feeler gauge, measure the clearance between the valve lifter and camshaft.
- Record the out–of–specification valve clearance measurements. They will be used later to determine the required replacement adjusting shim.


Valve clearance (Cold):


Intake: 0.15 – 0.25 mm (0.006 – 0.010 in.)

Exhaust: 0.25 – 0.35 mm (0.010 – 0.014 in.)

(b) Turn the crankshaft 1 revolution (360°) and align the mark as above. (See procedure in step 2)

(c) Check only the valves indicated as shown. Measure the valve clearance. (See procedure in step (a))

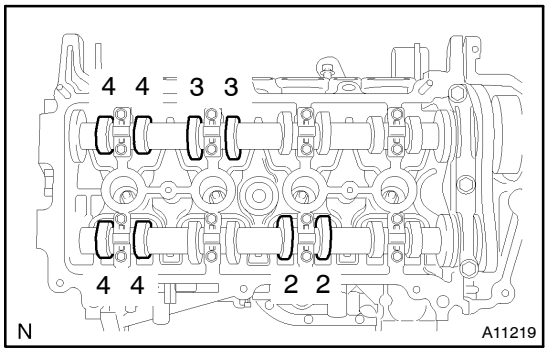

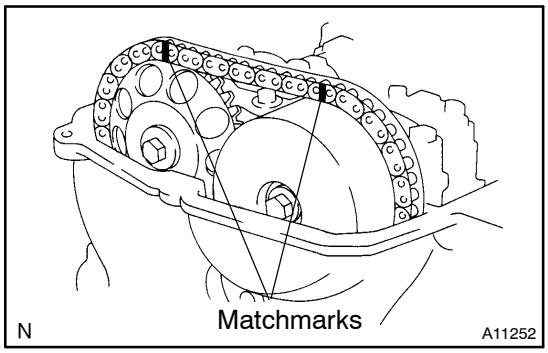


4. ADJUST VALVE CLEARANCE

(a) Set the No.1 cylinder to the TDC/compression (See procedure in step 2).

(b) Place matchmarks on the timing chain and camshaft timing sprockets.

(c) Rotate the crankshaft countercleckwise 40° from the TDC.

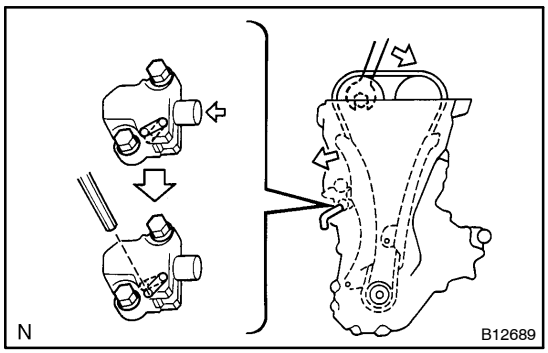

(d) Remove the plug from the timing chain cover.

(e) Using driver to hold the stopper plate of tensioner above the chain tentioner service hole.

(f) Turn the exhaust camshaft a little clockwise.

(g) Remove the driver from the chain tensioner service hole to lower the stopper plate, then insert the bar of 2 – 3 mm (0.08 – 0.12 in.).

NOTICE:

- **When the bar does not get inserted, turn the exhaust camshaft a little counterclockwise, then clockwise to insert it.**
- **Fix the bar with tape or others so that it does not be dropped off.**

(h) Hold the hexagonal portion of camshaft with a wrench, and loosen the bolt for camshaft timing sprocket.

(i) Remove the 19 bolts, No. 1 and No. 2 camshaft bearing caps.

(j) Remove the bolt and valve timing sprocket with the chain.

(k) Hold the hexagonal portion of the camshaft with a wrench, and remove the bolt and valve timing controller assembly with the chain.


NOTICE:

Do not disassembled the valve timing controller assembly.

(l) Remove the intake and exhaust camshaft assembly.

HINT:

When disconnect the timing chain from the camshaft timing sprocket, holding the timing chain.

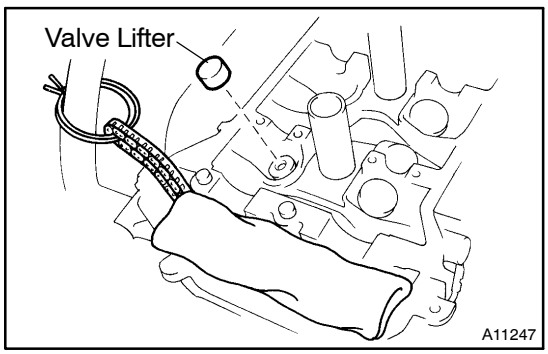


(m) Tie the timing chain with a string as shown in the illustration.

NOTICE:

- **Be careful not to drop anything inside the timing chain cover.**
- **Do not allow the chain to come into contact with water or dust.**

(n) Remove the valve lifters.

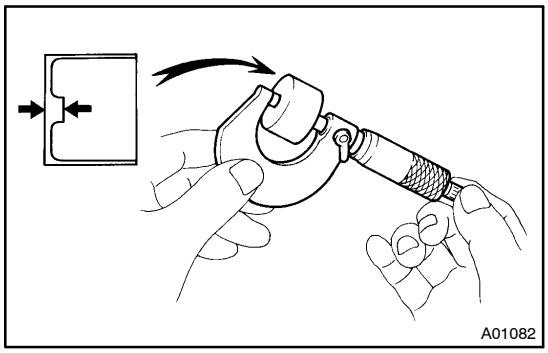

(o) Determine the replacement valve lifter size according to these Formula or Charts:

- Using a micrometer, measure the thickness of the removed lifter.
- Calculate the thickness of a new lifter so the valve clearance comes within the specified value.

T..... Thickness of used lifter
A..... Measured valve clearance
N..... Thickness of new lifter
Intake: N = T + (A – 0.20 mm (0.008 in.))
Exhaust: N = T + (A – 0.30 mm (0.012 in.))

- Select a new lifter with a thickness as close as possible to the calculated values.

HINT:
Lifter are available in 35 sizes in increments of 0.020 mm (0.0008 in.), from 5.060 mm (0.1992 in.) to 5.740 mm (0.2260 in.).

Valve Lifter Selection Chart (Intake)

Measured clearance mm (in.) \ Installed lifter thickness mm (in.)	5.060 (0.1992)	5.080 (0.2000)	5.100 (0.2008)	5.120 (0.2016)	5.140 (0.2024)	5.160 (0.2031)	5.180 (0.2039)	5.200 (0.2047)	5.210 (0.2051)	5.220 (0.2055)	5.230 (0.2059)	5.240 (0.2063)	5.250 (0.2067)	5.260 (0.2071)	5.270 (0.2075)	5.280 (0.2079)	5.290 (0.2083)	5.300 (0.2087)	5.310 (0.2091)	5.320 (0.2094)	5.330 (0.2098)	5.340 (0.2102)	5.350 (0.2106)	5.360 (0.2110)	5.370 (0.2114)	5.380 (0.2118)	5.390 (0.2122)	5.400 (0.2126)	5.410 (0.2130)	5.420 (0.2134)	5.430 (0.2138)	5.440 (0.2142)	5.450 (0.2146)	5.460 (0.2150)	5.470 (0.2154)	5.480 (0.2157)	5.490 (0.2161)	5.500 (0.2165)	5.510 (0.2169)	5.520 (0.2173)	5.530 (0.2177)	5.540 (0.2181)	5.550 (0.2185)	5.560 (0.2189)	5.570 (0.2193)	5.580 (0.2197)	5.590 (0.2201)	5.600 (0.2205)	5.620 (0.2213)	5.640 (0.2220)	5.660 (0.2228)	5.680 (0.2236)	5.700 (0.2244)	5.720 (0.2252)	5.740 (0.2260)
0.000 – 0.030 (0.0000 – 0.0012)									06	06	06	06	06	08	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36	36	38	38	40	40	42	42	44	46	48	50	52	54	56
0.031 – 0.050 (0.0012 – 0.0020)							06	06	06	06	08	08	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36	36	38	38	40	40	42	42	44	44	46	48	50	52	54	56	58
0.051 – 0.070 (0.0020 – 0.0028)						06	06	06	08	08	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36	36	38	38	40	40	42	42	44	44	46	46	48	50	52	54	56	58	60
0.071 – 0.090 (0.0028 – 0.0035)					06	06	06	08	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36	36	38	38	40	40	42	42	44	44	46	46	48	48	50	52	54	56	58	60	62
0.091 – 0.110 (0.0036 – 0.0043)				06	06	06	08	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36	36	38	38	40	40	42	42	44	44	46	46	48	48	50	50	52	54	56	58	60	62	64
0.111 – 0.130 (0.0044 – 0.0051)			06	06	06	08	10	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36	36	38	38	40	40	42	42	44	44	46	46	48	48	50	50	52	52	54	56	58	60	62	64	66
0.131 – 0.149 (0.0052 – 0.0059)		06	06	06	08	10	12	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36	36	38	38	40	40	42	42	44	44	46	46	48	48	50	50	52	52	54	54	56	58	60	62	64	66	68
0.150 – 0.250 (0.0059 – 0.0098)																																																								
0.251 – 0.270 (0.0099 – 0.0106)	12	14	16	18	20	22	24	26	28	28	30	30	32	32	34	34	36	36	38	38	40	40	42	42	44	44	46	46	48	48	50	50	52	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	70	72	74	74	74
0.271 – 0.290 (0.0107 – 0.0114)	14	16	18	20	22	24	26	28	30	30	32	32	34	34	36	36	38	38	40	40	42	42	44	44	46	46	48	48	50	50	52	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	72	74	74	74	
0.291 – 0.310 (0.0115 – 0.0122)	16	18	20	22	24	26	28	30	32	32	34	34	36	36	38	38	40	40	42	42	44	44	46	46	48	48	50	50	52	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	74	74	74		
0.311 – 0.330 (0.0122 – 0.0130)	18	20	22	24	26	28	30	32	34	34	36	36	38	38	40	40	42	42	44	44	46	46	48	48	50	50	52	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74			
0.331 – 0.350 (0.0130 – 0.0138)	20	22	24	26	28	30	32	34	36	36	38	38	40	40	42	42	44	44	46	46	48	48	50	50	52	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74					
0.351 – 0.370 (0.0138 – 0.0146)	22	24	26	28	30	32	34	36	38	38	40	40	42	42	44	44	46	46	48	48	50	50	52	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74						
0.371 – 0.390 (0.0146 – 0.0154)	24	26	28	30	32	34	36	38	40	40	42	42	44	44	46	46	48	48	50	50	52	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74						
0.391 – 0.410 (0.0154 – 0.0161)	26	28	30	32	34	36	38	40	42	42	44	44	46	46	48	48	50	50	52	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74	74							
0.411 – 0.430 (0.0162 – 0.0169)	28	30	32	34	36	38	40	42	44	44	46	46	48	48	50	50	52	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74	74									
0.431 – 0.450 (0.0170 – 0.0177)	30	32	34	36	38	40	42	44	46	46	48	48	50	50	52	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74	74											
0.451 – 0.470 (0.0178 – 0.0185)	32	34	36	38	40	42	44	46	48	48	50	50	52	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74														
0.471 – 0.490 (0.0185 – 0.0193)	34	36	38	40	42	44	46	48	50	50	52	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74																
0.491 – 0.510 (0.0193 – 0.0201)	36	38	40	42	44	46	48	50	52	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74																		
0.511 – 0.530 (0.0201 – 0.0209)	38	40	42	44	46	48	50	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74																			
0.531 – 0.550 (0.0209 – 0.0217)	40	42	44	46	48	50	52	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74																				
0.551 – 0.570 (0.0217 – 0.0224)	42	44	46	48	50	52	54	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74	74																					
0.571 – 0.590 (0.0225 – 0.0232)	44	46	48	50	52	54	56	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74																						
0.591 – 0.610 (0.0233 – 0.0240)	46	48	50	52	54	56	58	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74																						
0.611 – 0.630 (0.0241 – 0.0248)	48	50	52	54	56	58	60	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74																						
0.631 – 0.650 (0.0248 – 0.0256)	50	52	54	56	58	60	62	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74																						
0.651 – 0.670 (0.0256 – 0.0264)	52	54	56	58	60	62	64	66	68	68	70	70	72	72	74	74	74	74	74	74																						
0.671 – 0.690 (0.0264 – 0.0272)	54	56	58	60	62	64	66	68	70	70	72	72	74	74	74	74	74	74																								
0.691 – 0.710 (0.0272 – 0.0280)	56	58	60	62	64	66	68	70	72	72	74	74	74	74	74	74																								
0.711 – 0.730 (0.0280 – 0.0287)	58	60	62	64	66	68	70	72	74	74	74	74	74	74																								
0.731 – 0.750 (0.0288 – 0.0295)	60	62	64	66	68	70	72	74	74	74	74	74																										
0.751 – 0.770 (0.0296 – 0.0303)	62	64	66	68	70	72	74	74	74	74																												
0.771 – 0.790 (0.0304 – 0.0311)	64	66	68	70	72	74	74	74																														
0.791 – 0.810 (0.0311 – 0.0319)	66	68	70	72	74	74	74																															
0.811 – 0.830 (0.0319 – 0.0327)	68	70	72	74	74	74																																
0.831 – 0.850 (0.0327 – 0.0335)	70	72	74	74	74																																	
0.851 – 0.870 (0.0335 – 0.0343)	72	74	74	74																																		
0.871 – 0.890 (0.0343 – 0.0350)	74	74	74																																			
0.891 – 0.910 (0.0351 – 0.0358)	74	74																																				
0.911 – 0.930 (0.0359 – 0.0366)	74																																					

Intake valve clearance (Cold):
0.15 – 0.25 mm (0.006 – 0.010 in.)

EXAMPLE: The 5.250 mm (0.2067 in.) lifter is installed, and the measured clearance is 0.400 mm (0.0157 in.).
Replace the 5.250 mm (0.2067 in.) lifter with a new No. 48 lifter.

New lifter thickness mm (in.)

Lifter No.	Thickness	Lifter No.	Thickness	Lifter No.	Thickness
06	5.060 (0.1992)	30	5.300 (0.2087)	54	5.540 (0.2181)
08	5.080 (0.2000)	32	5.320 (0.2094)	56	5.560 (0.2189)
10	5.100 (0.2008)	34	5.340 (0.2102)	58	5.580 (0.2197)
12	5.120 (0.2016)	36	5.360 (0.2110)	60	5.600 (0.2205)
14	5.140 (0.2024)	38	5.380 (0.2118)	62	5.620 (0.2213)
16	5.160 (0.2031)	40	5.400 (0.2126)	64	5.640 (0.2220)
18	5.180 (0.2039)	42	5.420 (0.2134)	66	5.660 (0.2228)
20	5.200 (0.2047)	44	5.440 (0.2142)	68	5.680 (0.2236)
22	5.220 (0.2055)	46	5.460 (0.2150)	70	5.700 (0.2244)
24	5.240 (0.2063)	48	5.480 (0.2157)	72	5.720 (0.2252)
26	5.260 (0.2071)	50	5.500 (0.2165)	74	5.740 (0.2260)
28	5.280 (0.2079)	52	5.520 (0.2173)		

A01234

Valve Lifter Selection Chart (Exhaust)

Measured clearance mm (in.) \ Installed lifter thickness mm (in.)	5.060 (0.1992)	5.080 (0.2000)	5.100 (0.2008)	5.120 (0.2016)	5.140 (0.2024)	5.160 (0.2031)	5.180 (0.2039)	5.200 (0.2047)	5.210 (0.2051)	5.220 (0.2055)	5.230 (0.2059)	5.240 (0.2063)	5.250 (0.2067)	5.260 (0.2071)	5.270 (0.2075)	5.280 (0.2079)	5.290 (0.2083)	5.300 (0.2087)	5.310 (0.2091)	5.320 (0.2094)	5.330 (0.2098)	5.340 (0.2102)	5.350 (0.2106)	5.360 (0.2110)	5.370 (0.2114)	5.380 (0.2118)	5.390 (0.2122)	5.400 (0.2126)	5.410 (0.2130)	5.420 (0.2134)	5.430 (0.2138)	5.440 (0.2142)	5.450 (0.2146)	5.460 (0.2150)	5.470 (0.2154)	5.480 (0.2157)	5.490 (0.2161)	5.500 (0.2165)	5.510 (0.2169)	5.520 (0.2173)	5.530 (0.2177)	5.540 (0.2181)	5.550 (0.2185)	5.560 (0.2189)	5.570 (0.2193)	5.580 (0.2197)	5.590 (0.2201)	5.600 (0.2205)	5.620 (0.2213)	5.640 (0.2220)	5.660 (0.2228)	5.680 (0.2236)	5.700 (0.2244)	5.720 (0.2252)	5.740 (0.2260)
0.000 – 0.030 (0.0000 – 0.0012)																			06	06	06	06	08	08	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	36	38	40	42	44	46
0.031 – 0.050 (0.0012 – 0.0020)																06	06	06	06	06	08	08	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36	38	40	42	44	46	48
0.051 – 0.070 (0.0020 – 0.0028)														06	06	06	06	06	08	08	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36	36	38	40	42	44	46	48	50
0.071 – 0.090 (0.0028 – 0.0035)												06	06	06	06	06	08	08	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36	36	38	38	40	42	44	46	48	50	52
0.091 – 0.110 (0.0036 – 0.0043)										06	06	06	06	06	08	08	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36	36	38	38	40	40	42	44	46	48	50	52	54
0.111 – 0.130 (0.0044 – 0.0051)									06	06	06	06	08	08	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36	36	38	38	40	40	42	42	44	46	48	50	52	54	56
0.131 – 0.150 (0.0052 – 0.0059)								06	06	06	08	08	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36	36	38	38	40	40	42	42	44	44	46	48	50	52	54	56	58
0.151 – 0.170 (0.0059 – 0.0067)						06	06	06	08	08	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36	36	38	38	40	40	42	42	44	44	46	46	48	50	52	54	56	58	60
0.171 – 0.190 (0.0067 – 0.0075)				06	06	06	08	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36	36	38	38	40	40	42	42	44	44	46	46	48	48	50	52	54	56	58	60	62
0.191 – 0.210 (0.0075 – 0.0083)			06	06	06	08	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36	36	38	38	40	40	42	42	44	44	46	46	48	48	50	50	52	54	56	58	60	62	64
0.211 – 0.230 (0.0083 – 0.0091)		06	06	06	08	10	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36	36	38	38	40	40	42	42	44	44	46	46	48	48	50	50	52	52	54	56	58	60	62	64	66
0.231 – 0.249 (0.0091 – 0.0098)	06	06	06	08	10	12	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36	36	38	38	40	40	42	42	44	44	46	46	48	48	50	50	52	52	54	54	56	58	60	62	64	66	68
0.250 – 0.350 (0.0098 – 0.0138)																																																										
0.351 – 0.370 (0.0138 – 0.0146)	12	14	16	18	20	22	24	26	28	28	30	30	32	32	34	34	36	36	38	38	40	40	42	42	44	44	46	46	48	48	50	50	52	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	70	72	74	74	74
0.371 – 0.390 (0.0146 – 0.0154)	14	16	18	20	22	24	26	28	30	30	32	32	34	34	36	36	38	38	40	40	42	42	44	44	46	46	48	48	50	50	52	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	72	74	74	74	
0.391 – 0.410 (0.0154 – 0.0161)	16	18	20	22	24	26	28	30	32	32	34	34	36	36	38	38	40	40	42	42	44	44	46	46	48	48	50	50	52	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	74	74	74		
0.411 – 0.430 (0.0162 – 0.0169)	18	20	22	24	26	28	30	32	34	34	36	36	38	38	40	40	42	42	44	44	46	46	48	48	50	50	52	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74			
0.431 – 0.450 (0.0170 – 0.0177)	20	22	24	26	28	30	32	34	36	36	38	38	40	40	42	42	44	44	46	46	48	48	50	50	52	52	54	54	56	56	58	58	60	60	62	62	64	64	66	68	68	70	70	72	72	74	74	74	74	74				
0.451 – 0.470 (0.0178 – 0.0185)	22	24	26	28	30	32	34	36	38	38	40	40	42	42	44	44	46	46	48	48	50	50	52	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74					
0.471 – 0.490 (0.0185 – 0.0193)	24	26	28	30	32	34	36	38	40	40	42	42	44	44	46	46	48	48	50	50	52	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74						
0.491 – 0.510 (0.0193 – 0.0201)	26	28	30	32	34	36	38	40	42	42	44	44	46	46	48	48	50	50	52	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74	74							
0.511 – 0.530 (0.0201 – 0.0209)	28	30	32	34	36	38	40	42	44	44	46	46	48	48	50	50	52	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74										
0.531 – 0.550 (0.0209 – 0.0217)	30	32	34	36	38	40	42	44	46	46	48	48	50	50	52	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74	74											
0.551 – 0.570 (0.0217 – 0.0224)	32	34	36	38	40	42	44	46	48	48	50	50	52	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74														
0.571 – 0.590 (0.0225 – 0.0232)	34	36	38	40	42	44	46	48	50	50	52	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74																
0.591 – 0.610 (0.0233 – 0.0240)	36	38	40	42	44	46	48	50	52	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74																		
0.611 – 0.630 (0.0241 – 0.0248)	38	40	42	44	46	48	50	52	54	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74																				
0.631 – 0.650 (0.0248 – 0.0256)	40	42	44	46	48	50	52	54	56	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74																						
0.651 – 0.670 (0.0256 – 0.0264)	42	44	46	48	50	52	54	56	58	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74																							
0.671 – 0.690 (0.0264 – 0.0272)	44	46	48	50	52	54	56	58	60	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74																							
0.691 – 0.710 (0.0272 – 0.0280)	46	48	50	52	54	56	58	60	62	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74																							
0.711 – 0.730 (0.0280 – 0.0287)	48	50	52	54	56	58	60	62	64	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74																							
0.731 – 0.750 (0.0288 – 0.0295)	50	52	54	56	58	60	62	64	66	66	68	68	70	70	72	72	74	74	74	74	74	74																							
0.751 – 0.770 (0.0296 – 0.0303)	52	54	56	58	60	62	64	66	68	68	70	70	72	72	74	74	74	74	74	74																							
0.771 – 0.790 (0.0304 – 0.0311)	54	56	58	60	62	64	66	68	70	70	72	72	74	74	74	74	74	74																									
0.791 – 0.810 (0.0311 – 0.0319)	56	58	60	62	64	66	68	70	72	72	74	74	74	74	74	74																									
0.811 – 0.830 (0.0319 – 0.0327)	58	60	62	64	66	68	70	72	74	74	74	74	74	74																									
0.831 – 0.850 (0.0327 – 0.0335)	60	62	64	66	68	70	72	74	74	74	74	74																											
0.851 – 0.870 (0.0335 – 0.0343)	62	64	66	68	70	72	74	74	74	74																											
0.871 – 0.890 (0.0343 – 0.0350)	64	66	68	70	72	74	74	74																													
0.891 – 0.910 (0.0351 – 0.0358)	66	68	70	72	74	74	74																														
0.911 – 0.930 (0.0359 – 0.0366)	68	70	72	74	74	74																															
0.931 – 0.950 (0.0367 – 0.0374)	70	72	74	74	74																																
0.951 – 0.970 (0.0374 – 0.0382)	72	74	74	74																																	
0.971 – 0.990 (0.0382 – 0.0390)	74	74	74																																		
0.991 – 1.010 (0.0390 – 0.0398)	74	74																																			
1.011 – 1.030 (0.0398 – 0.0406)	74																																				

Exhaust valve clearance (Cold):
0.25 – 0.35 mm (0.010 – 0.014 in.)


EXAMPLE: The 5.340 mm (0.2102 in.) lifter is installed, and the measured clearance is 0.440 mm (0.0173 in.).
Replace the 5.340 mm (0.2102 in.) lifter with a new No. 48 lifter.

New lifter thickness mm (in.)


Lifter No.	Thickness	Lifter No.	Thickness	Lifter No.	Thickness
06	5.060 (0.1992)	30	5.300 (0.2087)	54	5.540 (0.2181)
08	5.080 (0.2000)	32	5.320 (0.2094)	56	5.560 (0.2189)
10	5.100 (0.2008)	34	5.340 (0.2102)	58	5.580 (0.2197)
12	5.120 (0.2016)	36	5.360 (0.2110)	60	5.600 (0.2205)
14	5.140 (0.2024)	38	5.380 (0.2118)	62	5.620 (0.2213)
16	5.160 (0.2031)	40	5.400 (0.2126)	64	5.640 (0.2220)
18	5.180 (0.2039)	42	5.420 (0.2134)	66	5.660 (0.2228)
20	5.200 (0.2047)	44	5.440 (0.2142)	68	5.680 (0.2236)
22	5.220 (0.2055)	46	5.460 (0.2150)	70	5.700 (0.2244)
24	5.240 (0.2063)	48	5.480 (0.2157)	72	5.720 (0.2252)
26	5.260 (0.2071)	50	5.500 (0.2165)	74	5.740 (0.2260)
28	5.280 (0.2079)	52	5.520 (0.2173)		

A01235


(p) Reinstall the valve lifters (See page EM–42).
(q) Align the crankshaft pulley groove with the timing mark "0" of the timing chain cover.
(r) Hold the timing chain, and place the exhaust camshaft and timing sprocket assembly.
(s) Align the matchmarks on the timing chain and camshaft timing sprocket.

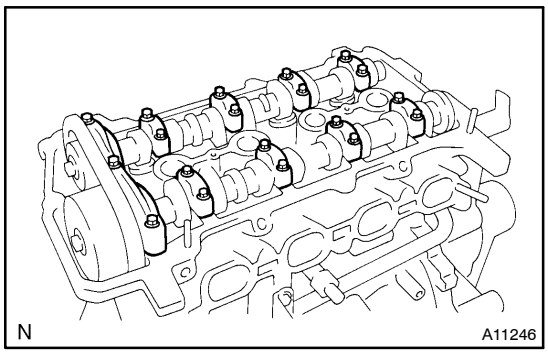

(t) Reinstall the intake camshaft, valve timing controller assembly and camshaft bearing caps (See page EM–44).
(u) Remove the bar from the timing chain tensioner.

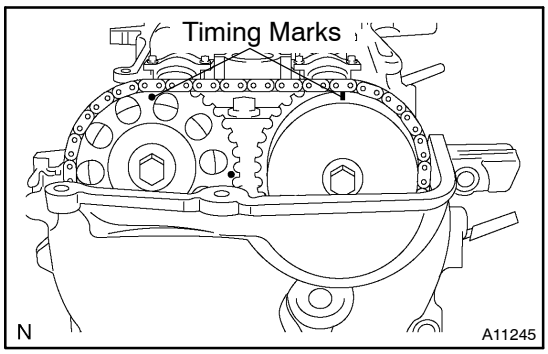

(v) Check that both timing marks on the camshaft timing sprocket and valve timing controller assembly are facing right upas shown in the illustration.

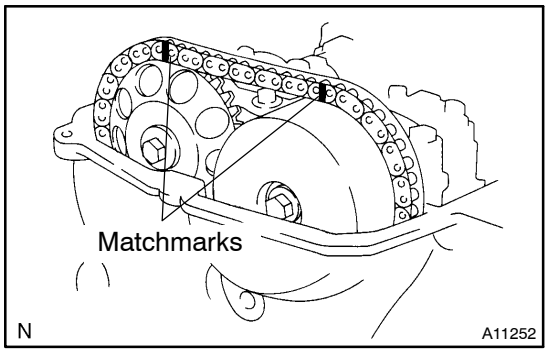

(w) Check that the matchmarks on the timing chain and camshaft timing sprockets.
(x) Install a new plug to the timing chain cover.
Torque: 15 N·m (150 kgf·cm, 11 ft·lbf)
(y) Recheck the valve clearance (See procedure in step 3).
(z) Check the valve timing (See page EM–18).

5. REINSTALL CYLINDER HEAD COVER
(See page EM–20)